


## NAD 500, 750, 1000 v2

Sockets for NAD storage vessels may be provided with G 6/4" optional sockets. A G 6/4" socket allows installing a TJ 6/4" electric heating unit. The number of sockets may vary and could be customized upon customer's requirements. The socket is plugged in the basic design. Storage vessels may be supplied with 100 mm thick polyurethane foam (molitan) insulation.

Maximum pressure in the tank	0,6 MPa	Maximum heating water temperature in the tank	90 °C
------------------------------	---------	---	-------

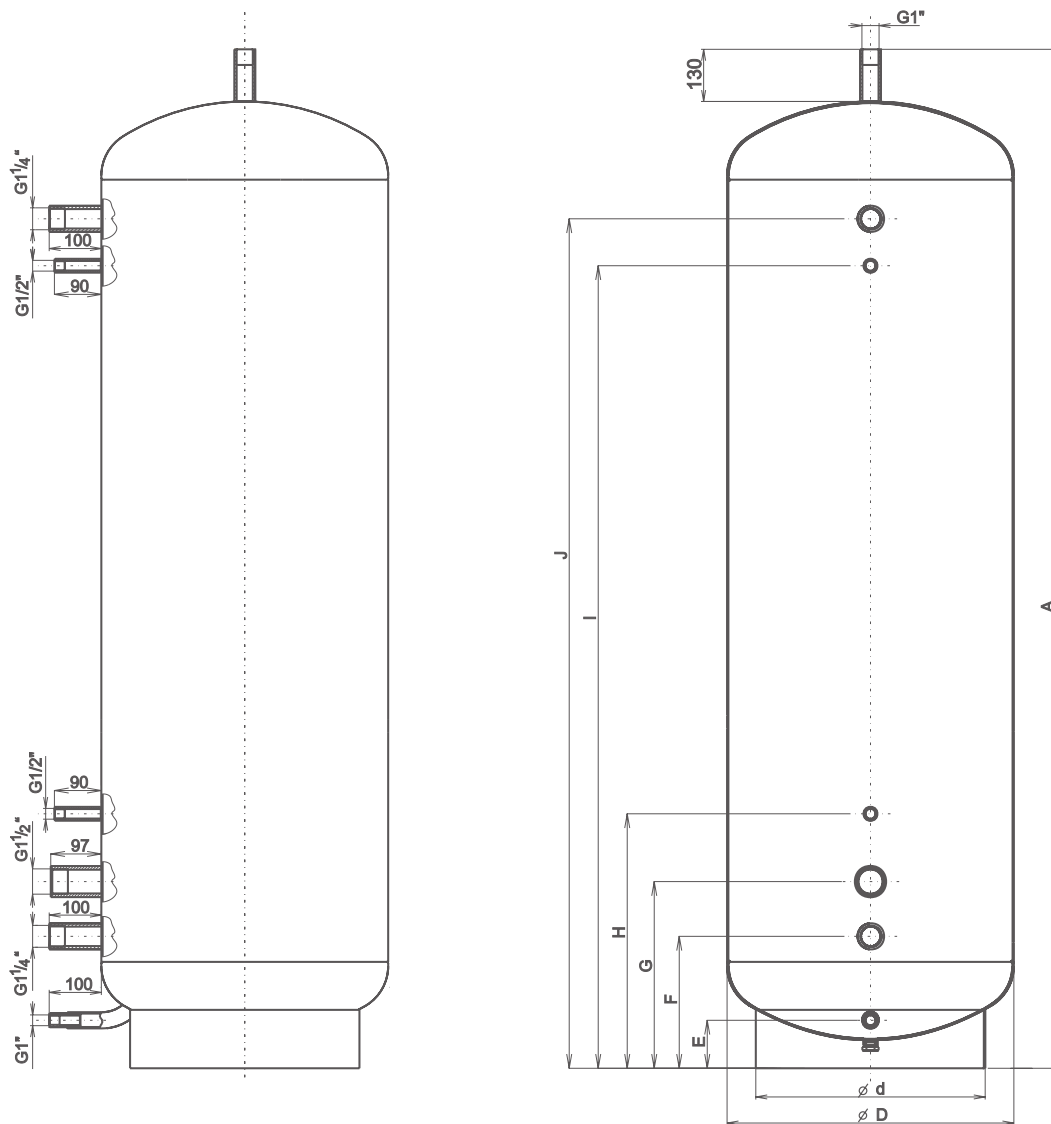

Volume (l)	Diameter D	A	E	F	G	H	I	J
500	600	1990	90	260	364	494	1545	1635
750	750	2020	90	272	376	506	1557	1647
1000	850	2053	90	287	391	521	1572	1662